A-Line



Multi-purpose and corrosion-resistant luminaires

Robust and durable luminaires with a choice of polycarbonate or acrylic cover. Extruded aluminium body with die-cast ends. Long life silicone sponge gasket ensuring IP66 rating.

Applications: Cold stores, food factories, public areas, dairies, abattoirs, water treatment works, cable tunnels and multi-storey car parks.

- Robust and durable extruded aluminium body dissipates heat, ensuring long control gear life in higher ambient temperatures
- Choice of high corrosion-resistant acrylic or impact-resistant, fireretardant polycarbonate covers
- Factory fitted 4-core through wiring option (alternative configurations to special order)
- Optional tamper-resistant stainless steel cover screws
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



IP66 Up to IK10 Up to 176.4 LL/CW SMARTSCAR 🗘 LUXGUARD

Specification

Specification			
Mounting	Surface	IP rating	IP66
Impact rating	Up to IK10	Max presence detection height	8 m
Lighting			
Optic	Clear acrylic cover Clear polycarbonate cover	Lumen output	3,670 lm - 10,535 lm
Efficacy	Up to 176.4 LL/CW		
Emergency data			
Emergency lumen output	510 lm - 535 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)
Power			
LED power	20 W - 56 W	Circuit power	22 W - 65 W
LED characteristics			
CRI	80+	Colour temperature	4000 K


A-Line



Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of Food production standards energy efficiency class B		BRC HACCP
			IFS
MOD compliance	JSP482 Chapter 8 Document for		
	'Category C' areas		

Dimensions

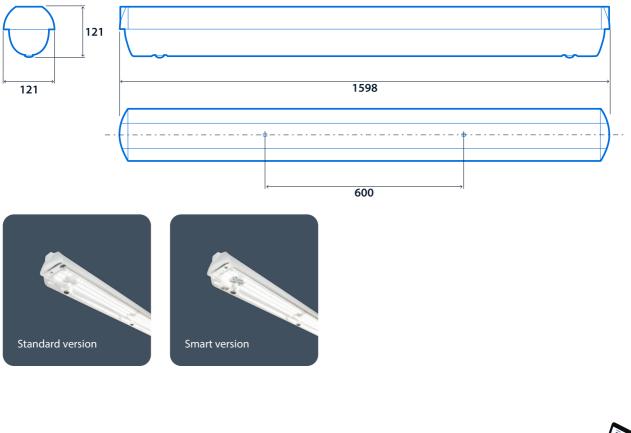





Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.