

Circular LED luminaires suitable for wall or ceiling mounting

A perfect balance between aesthetics and performance, the Clara 360 adds a sophisticated element to interior and exterior lighting schemes. Clara 360 uses medium power LEDs mounted onto specially designed circuit boards which provide excellent thermal management and LED failure protection.

A super-efficient reflector directs the light out of the luminaire and achieves 132.6 lumens per circuit watt. Standard, dimming, SmartScan and emergency versions are available. Clara 360 is rated IP54 suitable for use indoors and outside, with an excellent IK09 impact rating. Please also see Clara 90 and Clara 180.

Applications: corridors, stairwells, reception areas, meeting rooms, outdoor under canopy, wall mounted external.

- IP54 rating ensures suitability for both indoor and outdoor use
- Optional 3 W LED backlight (RGB or white)
- Emergency light provided by two integral 1 W high power LEDs
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit











Specification

Mounting Surface IP rating IP54
Impact rating IK09 Max presence detection height 8 m

Lighting

Optic Satin sparkle cover Lumen output 3,050 lm
Efficacy 132.6 LL/CW

Emergency data

Emergency lumen output 205 lm Emergency type Maintained

Emergency duration 3 hours Battery specification Nickel Metal Hydride (NiMH)

Power

LED power 20 W Circuit power 23 W

LED characteristics

 CRI
 80+
 Colour temperature
 4000 K

 Rated life (hours)
 100 K - L80/B10
 4000 K

Compliance


UKCA Yes CE Yes

Energy efficiency class This product contains a light source of

energy efficiency class B



Dimensions

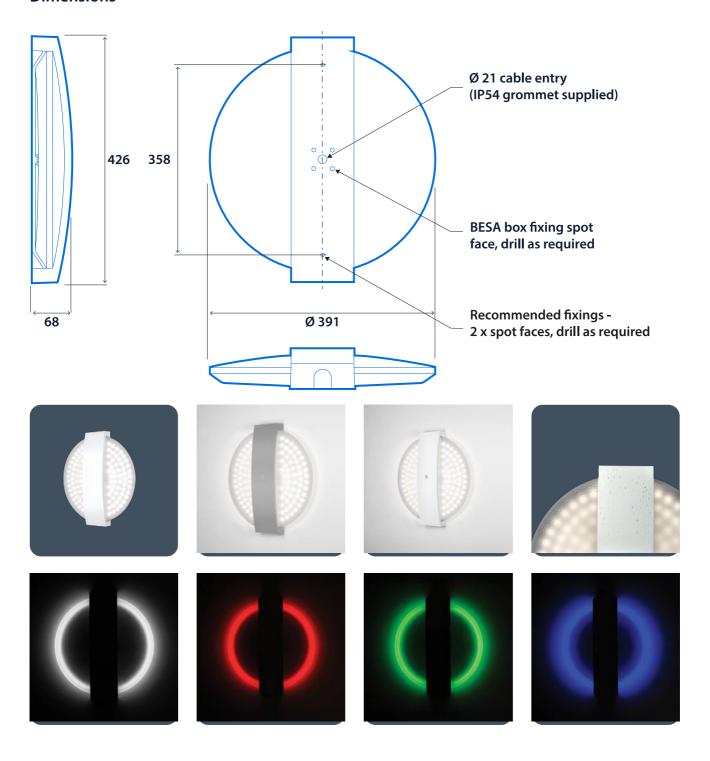

2



Click or scan here

View Clara 360 variants using our online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.