

Circular luminaires suitable for surface or semi-recessed mounting

Circular, slim profile, surface mounted or semi-recessed luminaires with spun aluminium body. Opal, high efficiency satin or LED satin sparkle polycarbonate cover. LED versions available with optional red, green, blue (RGB) or white LEDs with light green tinted backlit halo ring.

Applications: corridors, general circulation areas, staircases, bedrooms and toilet areas.

- Opal or high efficiency satin sparkle effect fire-retardant polycarbonate diffuser
- Optional light green tinted backlight halo (RGB or white)
- Semi-recessed mounting option (see accessories for kit)
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

Notes: Backlight halo is switched in line with the main light source via the SmartScan system









Specification

Mounting Surface IP rating IP40
Nominal size 350 mm dia. Max presence detection height Up to 8 m

Lighting

Optic Opal diffuser Lumen output 1,865 lm - 4,100 lm

Satin sparkle diffuser

450 mm dia.

Efficacy Up to 165.2 LL/CW

Emergency data

Emergency lumen output 90 lm - 460 lm Emergency type Maintained

Emergency duration 3 hours Battery specification Lithium Iron Phosphate (LiFePO4) Nickel Metal Hydride (NiMH)

Power

LED power 13 W - 17 W Circuit power 16 W - 27 W

LED characteristics

CRI 80+ Colour temperature 4000 K

Rated life (hours) 100 K - L80/B10




Compliance

UKCA Yes CE Yes

Energy efficiency class This product contains a light source of Thermoplastic rating energy efficiency class B

Dimensions

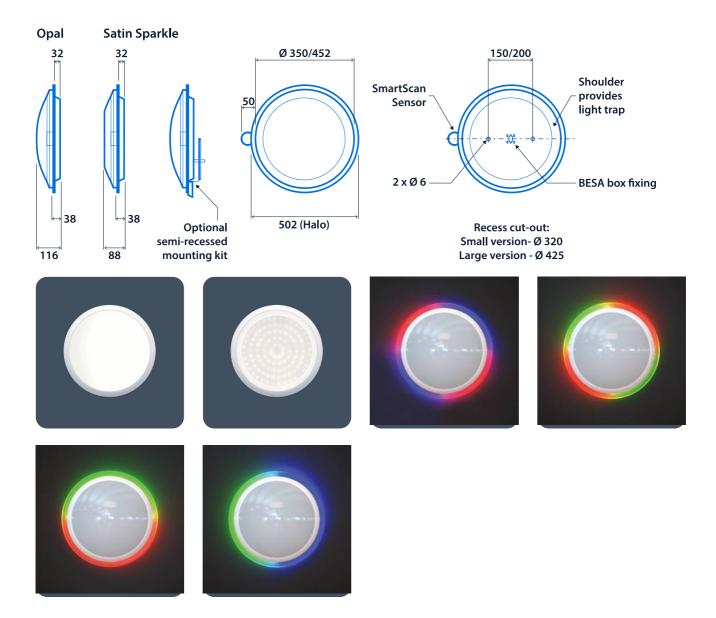



Click or scan here

View Dot variants using our online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.