Kanby Zip



LED controller continuous lighting system

LED controller continuous lighting system for surface or suspension mounting. The luminaire modules are designed to snap into sockets located at regular intervals within the Zipline extruded aluminium trunking.

Applications: Hospital, schools, social housing, data centres.

- Polycarbonate diffuser: Carefully controlled nanoprism optic version for EN12464-1 / LG7 (<3000 cd/m² @ 65°) compliance or opal version
- Fire-retardant external plastic parts
- Designed to exclude dust, dirt and flies
- Pre-installed wiring loom, module sockets at 750 mm intervals
- Plug and socket connections between trunking joints
- Modules click fit using stainless steel spring (requires a standard screwdriver to release)
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit









Specification

Mounting Surface IP rating IP40

Suspended

Max presence detection height 8 m

Lighting

Optic Low glare diffuser Lumen output 2,380 lm - 7,680 lm

Opal diffuser

Efficacy Up to 138.8 LL/CW

Emergency data

Emergency lumen output 360 lm - 380 lm Emergency type Maintained

Emergency duration 3 hours Battery specification Nickel Metal Hydride (NiMH)

Power

LED power 15 W - 53 W Circuit power 19 W - 61 W

LED characteristics

CRI 80+ Colour temperature 4000 K

Rated life (hours) 67 K - L80/B10

Kanby Zip




Compliance

UKCA Yes CE Yes

Energy efficiency class This product contains a light source of

energy efficiency class B

Dimensions

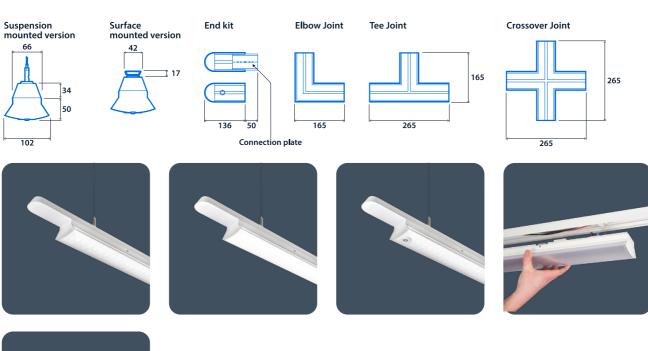



Click or scan here

View Kanby Zip variants using our online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.