Prismalette



Vandal-resistant luminaires

Luminaires suitable for internal or external use. Strong high-pressure die-cast aluminium body with flame-retardant polycarbonate cover. Photocell, SmartScan Radar and maintained emergency versions available.

Applications: security areas, precincts, subways, passages and corridors.

- Tamper-resistant cover screws as standard
- Optional photocell control
- Optional bezel trim for semi-recessed mounting
- Complies with M.O.D. JSP482 Chapter 8 Document for 'Category C' areas
- Microwave presence detector option with stand-by light level feature
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

Notes: Photocell options are not suitable for semi-recessed or cornice mounting



IP65	IK11	Up to 125.4 LL/CW	S M A R T S C A N	🗘 L U X G U A R D

Specification

specification			
Mounting	Surface	IP rating	IP65
Impact rating	IK11	Max presence detection height	Up to 4 m
Lighting			
Optic	Low profile satin cover Satin cover	Lumen output	1,645 lm - 2,395 lm
Efficacy	Up to 125.4 LL/CW		
Emergency data			
Emergency lumen output	340 lm - 380 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Lithium Iron Phosphate (LiFePO4) Nickel Metal Hydride (NiMH)
Power			
LED power	11 W - 16 W	Circuit power	14 W - 20 W
LED characteristics			
CRI	80+	Colour temperature	4000 K
Rated life (hours)	100 K - L80/B10		

Prismalette




Compliance

UKCA Energy efficiency class

Yes CE This product contains a light source of MOD compliance energy efficiency class B Yes JSP482 Chapter 8 Document for 'Category C' areas

Dimensions

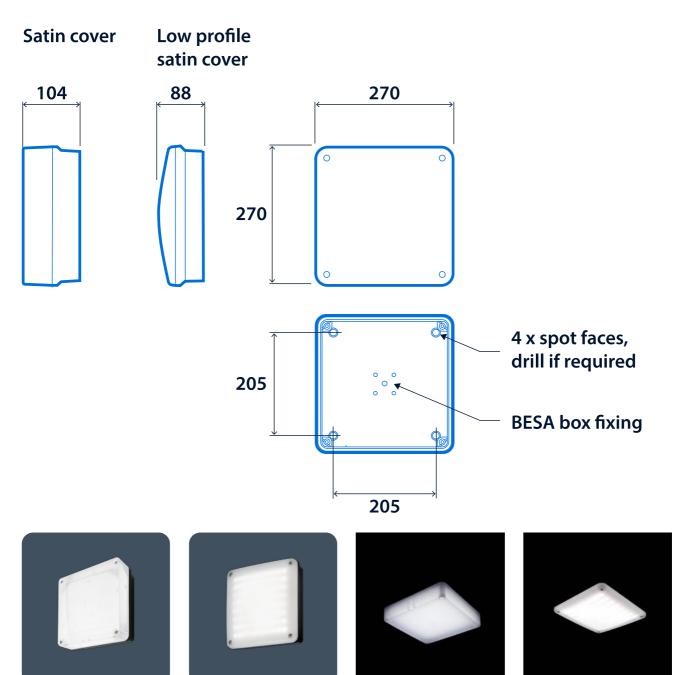

Prismalette





Click or scan here View Prismalette variants using our online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.