


Narrow, low-glare, recessed, asymmetric corridor LED luminaires

Narrow body recessed luminaire for use in hospital corridors. The edge-lit panel combined with carefully controlled optical distribution provide a low-glare asymmetric distribution to evenly illuminate hospital corridors from an off-centre position. The Radiance Corridor is specifically designed to provide a 'visual comfort zone' and helps provide compliance with CIBSE 2008 Hospital Lighting Guide (LG2).

Applications: Healthcare corridors.

- Carefully controlled optics provide a low glare asymmetric distribution to evenly illuminate hospital corridors from an off-centre position
- Edge-lit diffuser technology reduces visible LEDs
- Specifically designed to provide a 'visual comfort zone'
- Complies with CIBSE 2008 Hospital Lighting Guide (LG2)
- Suitable for most ceiling types; lay-in as standard or pull up with optional side arm suspensions
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

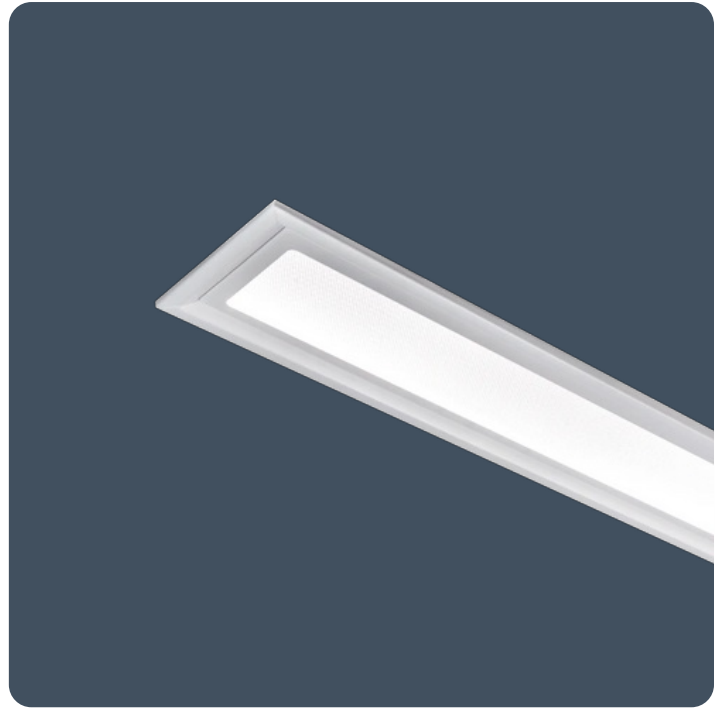

Notes: Bespoke sizes available to special order

IP40 (IP20 above ceiling)

114.6 LL/CW

SMARTSCAN

LUXGUARD

Specification

| | | | |
|-------------------------------|-----------------|-----------|----------------------------------|
| Mounting | Recessed | IP rating | IP40 (IP20 above ceiling) |
| Max presence detection height | 8 m | | |

Lighting

| | | | |
|----------|---------------------------|--------------|-----------------|
| Optic | Low glare diffuser | Lumen output | 2,980 lm |
| Efficacy | 114.6 LL/CW | | |

Emergency data

| | | | |
|------------------------|----------------|-----------------------|------------------------------------|
| Emergency lumen output | 500 lm | Emergency type | Maintained |
| Emergency duration | 3 hours | Battery specification | Nickel Metal Hydride (NiMH) |

Power

| | | | |
|-----------|-------------|---------------|-------------|
| LED power | 24 W | Circuit power | 26 W |
|-----------|-------------|---------------|-------------|


LED characteristics

| | | | |
|--------------------|-----------------------|--------------------|---------------|
| CRI | 80+ | Colour temperature | 4000 K |
| Rated life (hours) | 67 K - L80/B10 | | |

Compliance

| | | | |
|-------------------------|--|----|-------|
| UKCA | Yes | CE | Yes |
| Energy efficiency class | This product contains a light source of Thermoplastic rating energy efficiency class A | | TP(a) |

Dimensions

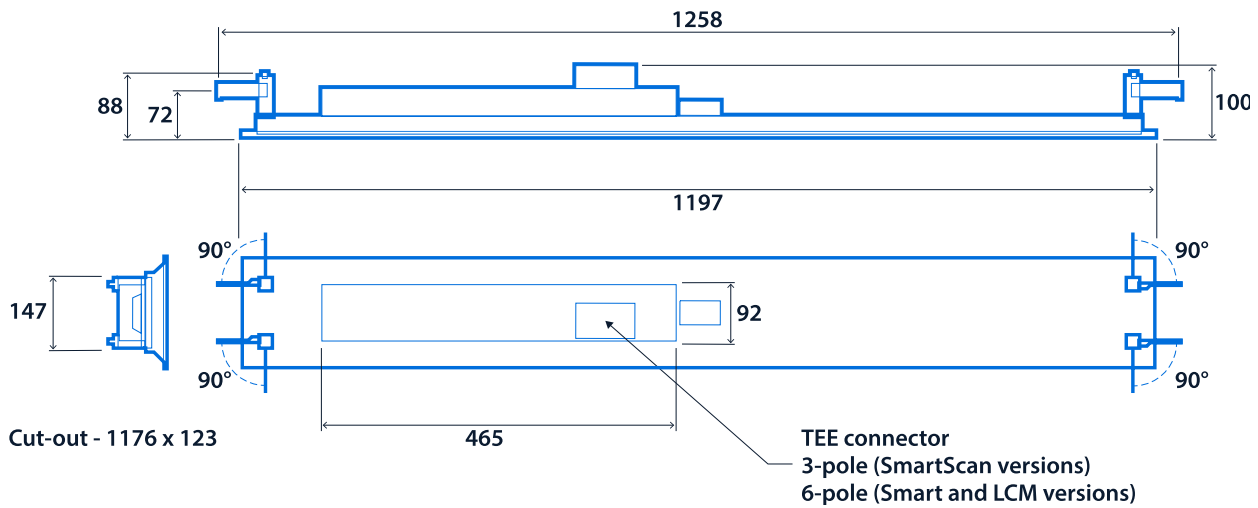

Click or scan here
View Radiance Corridor variants
using our online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.