


Circular recessed downlighters

Recessed luminaires with injection moulded reflector finished white. Open IP20 and frosted IP65 versions available in 14 W and 20 W.

Applications: reception areas, retail, public areas and toilets.

- Sprung suspension arms for rapid installation
- Supplied with remote gear unit fitted with 2 m lead
- Luminaires can be supplied pre-wired with a purpose made 1 m connection lead for plugging directly into the Smart Hub
- Fitted with CRI 90 LEDs with enhanced R9 value. Suitable for retail applications

Notes: CRI 80 version available to special order (minimum order quantity applies)

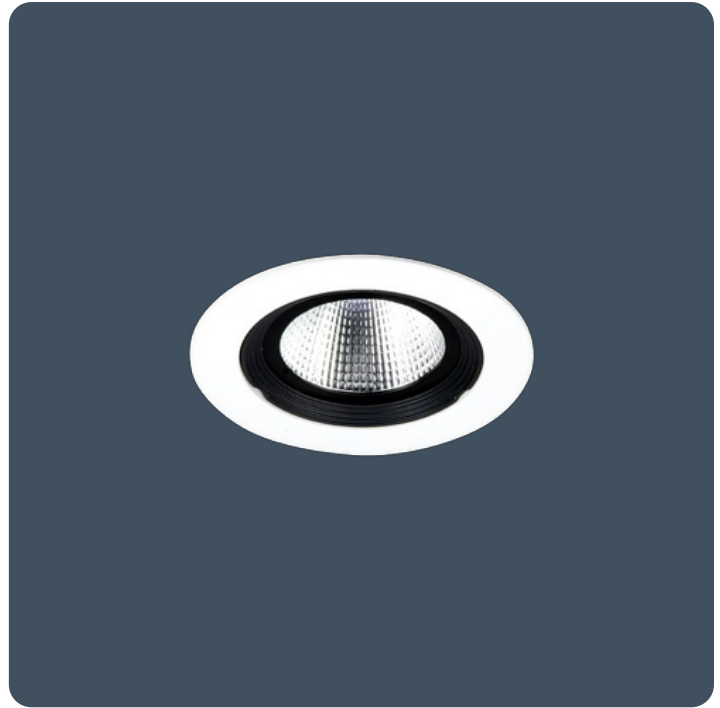

Up to IP65 (IP20 above ceiling)

Up to 91.7 LL/CW

Specification

Mounting	Recessed	IP rating	Up to IP65 (IP20 above ceiling)
----------	----------	-----------	---------------------------------

Lighting

Lumen output	1,270 lm - 2,110 lm	Efficacy	Up to 91.7 LL/CW
--------------	---------------------	----------	------------------

Power

LED power	14 W - 20 W	Circuit power	17 W - 23 W
-----------	-------------	---------------	-------------

LED characteristics


CRI	90+	Colour temperature	3000 K 4000 K
Rated life (hours)	50 K - L70/B10		

Compliance


UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class E		

Dimensions


IP20 Version

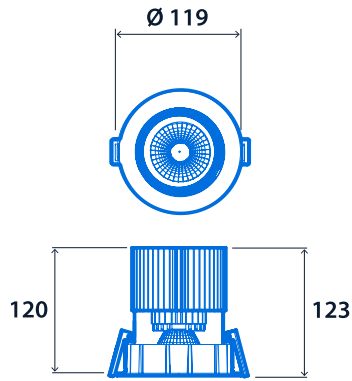

IP65 Version

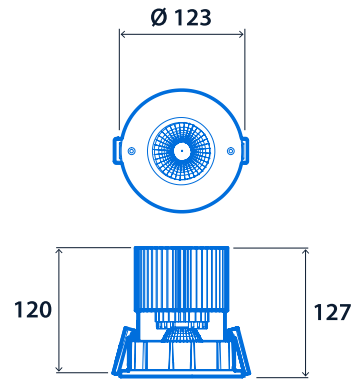

Standard Remote Driver

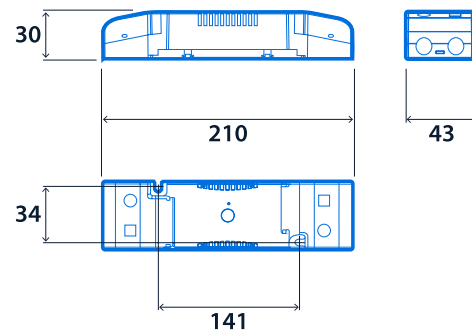

Click or scan here
View Tego variants using our
online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.