

Tamper, impact and ligature-resistant surface LED luminaires

Ligature-resistant, low profile, robust and durable luminaire with impact-resistant polycarbonate cover and extruded aluminium body with die-cast ends.

Applications: Cold stores, mental health, car parks, public areas, railway stations, foot bridges and underpasses.

- Body dissipates heat, ensuring long control gear life in higher ambient temperatures
- Suitable for both individual and in-line mounting
- Complies with food production standards IFS, HACCP and BRC
- SmartScan Radar versions with sensor discretely hidden behind the cover



IP65
IK11
Up to 83.0 LL/CW
SMARTSCAN

Specification

Mounting	Surface	IP rating	IP65
Impact rating	IK11	Nominal size	700 mm 1300 mm
Max presence detection height	4 m		

Lighting

Optic	Clear prismatic cover	Lumen output	1,635 lm - 5,060 lm
Efficacy	Up to 83.0 LL/CW		

Emergency data

Emergency lumen output	380 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

Power

LED power	19 W - 56 W	Circuit power	22 W - 61 W
-----------	-------------	---------------	-------------

LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	50 K - L70/B10		


Compliance

UKCA
Energy efficiency class

Yes
This product contains a light source of Food production standards energy efficiency class C

Yes
BRC
HACCP
IFS

Dimensions

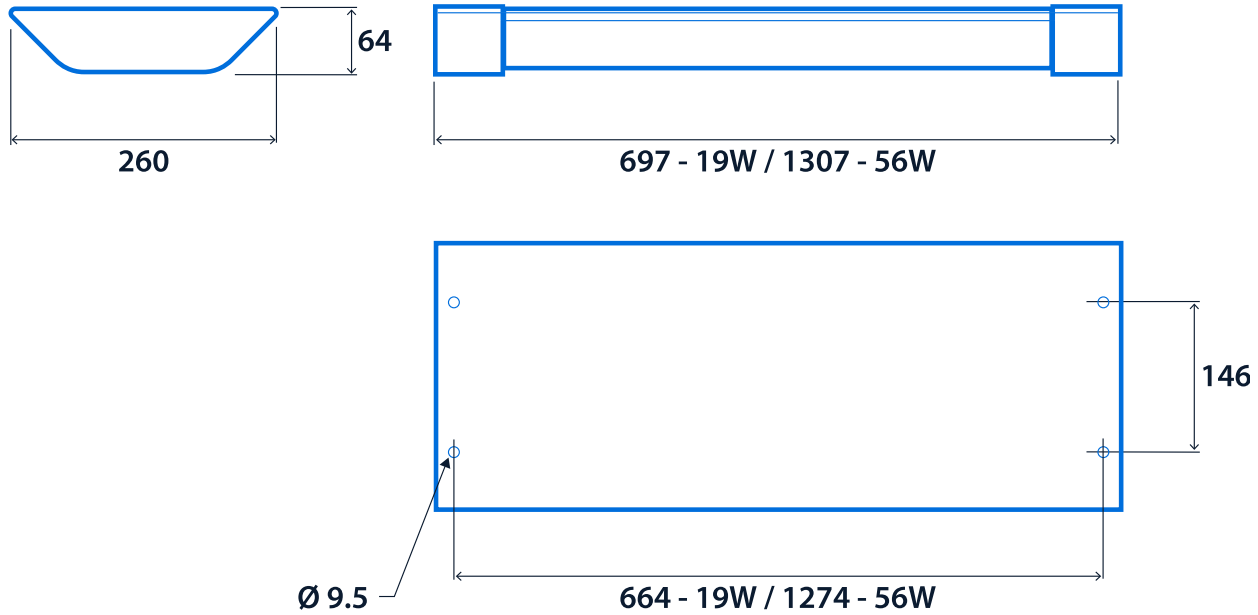

Click or scan here
View Ventego variants using our
online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.